



**Eur päisches
Patentamt**

**Eur pean
Patent Office**

**Office européen
des brevets**

Q76251

1087

J. de Weert

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02360252.7

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

24/09/02



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 02360252.7

Anmeldetag:
Date of filing:
Date de dépôt: 30/08/02

Anmelder:
Applicant(s):
Demandeur(s):
ALCATEL
75008 Paris
FRANCE

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:

Method for scaling peak power amplitudes in a signal and corresponding transmitter

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing:
Etats contractants désignés lors du dépôt:

AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR

Bemerkungen:
Remarks:
Remarques:

METHOD FOR SCALING PEAK POWER AMPLITUDES IN A SIGNAL AND CORRESPONDING TRANSMITTER

The present invention relates to a system and method for
5 transmitting digital signals, particularly with techniques to reduce the peak
to average ratio (PAR) of signals transmitted in systems using e.g.
Orthogonal Code Division Multiplex (OCDM) or Orthogonal Frequency
Division Multiplex (OFDM).

Usually, the transmit chain of a radio communication network
10 comprises a power amplifier to amplify a signal before transmission over
the radio interface. The PAR is an important characteristic of the signal
submitted to the power amplifier. The PAR is defined by the ratio between
the highest amplitude of the signal and the average amplitude of the signal.

Wideband multi-carrier signals transmitted by one or several users
15 using spread spectrum techniques (e.g. OCDM, OFDM) are presenting a
near-gaussian frequency distribution with a stringent spectrum mask and
wide envelope modulation dynamic resulting in high Peak to Average Ratio
(PAR about 12dB).

A power amplifier is usually characterized by its efficiency defined
20 as the ratio between the power of the signal at the amplifier output and the
total power consumption of the power amplifier.

A signal having a high Peak to Average Ratio results in a low
efficiency of the power amplifier. For a standard compliant amplification of
a CDMA signal with a PAR about 12dB, an over-dimensioning of the
25 amplifier chain of the same order is required (known as power amplifier
backoff of about 12dB). Such an over-dimensioning causes big penalties in
terms of required energy supply or appropriate cooling means at the
transmitters of the radio communication network (especially at the base
stations). This over-dimensioning is nevertheless necessary not to reach the
30 non-linear domain of the power amplifier characteristics. If this happens,

peaks in the signal would saturate the power amplifier causing high bit error rate at the receiver because of modulation distortion.

A known countermeasure to this problem is the clipping technique. It consists in eliminating from the signal the peaks having an amplitude
5 above a threshold amplitude determined according to the characteristics of the power amplifier. This is usually obtained by saturating the signal at this amplitude threshold. The choice of the threshold value is a tradeoff between the power amplifier efficiency and the quality of the transmitted signal. Indeed, the lower the threshold is set, the more information contained in the
10 peaks will be removed from the signal and the more the quality is decreased.

The usual clipping techniques have to face non linear filtering problems. On the one hand, saturating the signal at the threshold value generate wide band noise not compatible with requirements set to the
15 signal in term of spectrum mask. Indeed, usual clipping techniques cause the signal spectrum to extend beyond the allowed spectrum mask causing interference in adjacent frequency channels. On the other hand, when filtering is performed to eliminate the noise outside the allowed spectrum mask, the memory effect intrinsic to filtering regenerates signal peaks above
20 the desired threshold value.

Another known method consists in clipping the signal by subtracting a predefined clipping function from the signal when a given power threshold is exceeded. In order to ensure that clipping does not cause any out-of-band interference, a function having approximately the same
25 bandwidth as the signal to clip is selected.

This method gives good results as long as no peaks exceeding the threshold fall into the range of the clipping function of another peak.

Figure 1a shows such a situation where the distance between the peaks exceeding the threshold is large enough not to cause interference
30 between the clipping of different peaks. Figure 1a illustrates the clipping

functions $\delta_{1a}(x)$, ..., $\delta_{3a}(x)$ for three peaks Peak1a, ..., Peak 3a respectively separated by a distance Δ_{1a} , ..., Δ_{2a} . The clipping functions $\delta_{1a}(x)$, ..., $\delta_{3a}(x)$ are not overlapping since the distance between the peaks is large enough so that the intersection of the clipping function happens in domains where
 5 the clipping functions are very attenuated. Each of the clipping functions $\delta_{1a}(x)$, ..., $\delta_{3a}(x)$ are multiplied with a scaling factor depending on the peak amplitude and calculated using a usual method.

Figure 1b, on the contrary, shows a situation where a three peaks exceeding the threshold are concentrated in a small domain causing
 10 interference when the signal is clipped. Figure 1b illustrates the clipping functions $\delta_{1b}(x)$, ..., $\delta_{3b}(x)$ for three peaks Peak1b, ..., Peak 3b respectively separated by a distance Δ_{1b} , ..., Δ_{2b} . In this case, the clipping functions $\delta_{1b}(x)$, ..., $\delta_{3b}(x)$ are overlapping. The power of the second peak Peak 2b is already decreased when clipping is applied either to Peak 1b or to Peak 3b.
 15 As a consequence, the usual scaling factor calculated for Peak 2b depending on its amplitude before any clipping is applied is too high. If such an effect is neglected peak 2b will be overclipped.

A solution to this inconvenient consists in performing several iterations of the clipping method, at each iteration only the highest peaks
 20 separated by a large enough distance (not causing overlapping of their clipping functions) are clipped in additional iterations the remaining other peaks are clipped. This method is described in European patent application EP 1 195 892.

An inconvenient of the previous described clipping method is that
 25 only a simplified interaction model is used to cope with overclipping causing an increased Peak Code Domain Error and an increased bit error rate.

The object of the present invention is to provide a method for scaling peak power amplitude in a signal that better deals with the
 30 reduction of overclipping.

Another object of the present invention is to provide a transmitter implementing this method.

These objects, and others that appear below, are achieved by a method for scaling peak power amplitudes in a signal according to claim 1
5 and a transmitter according to claim 8.

According to the present invention the method reduces overclipping effects by taking into account the interactive influence of adjacent peaks. The result of this method are near to the theoretical limit.

The method according to the invention has the advantage of
10 keeping the Adjacent Channel Leakage power Ratio (ACLR), as defined in 3GPP TS 25.141 v3.6.0 paragraph 6.5.2.2, in an acceptable range.

Another advantage is to provide an efficient clipping method especially when the power amplifier is used to amplify a multi-carrier signal.

Another advantage is to optimize the frequency spectrum purity for
15 the clipped signal. As a consequence, it increases the system capacity since the ACLR is kept in a acceptable range.

In a preferred embodiment of the invention successive iteration of the scaling method are applied to the signal in order to progressively suppress the signal peaks.

20 Further advantageous features of the invention are defined in the dependent claims.

Other characteristics and advantages of the invention will appear on reading the following description of a preferred implementation given by way of non-limiting illustrations, and from the accompanying drawings, in
25 which:

- Figure 1 shows a first signal Fig 1a where no overclipping effect happens and a second signal fig 1b where overclipping effect happens.
- Figure 2 shows a flow diagram for a possible implementation of the
30 clipping method according to the present invention;

- Figure 3 shows an embodiment of a transmitter according to the present invention;
- Figure 4 shows results of the clipping method according to the present invention applied on a signal;
- 5 - Figure 5 shows the ACLR obtained when using different clipping method.

Figures 1a and 1b have already been described in relation to prior art.

The following description applies a single carrier signal as well as
10 to a multi-carrier signal.

Figure 2 shows a flow diagram for a possible implementation of the clipping method according to the present invention.

In the following, a signal $s(t)$ to be clipped will be decomposed in its in-phase $I(t)$ and in-quadrature $Q(t)$ components so that $s(t) = (I(t), Q(t))$.

15 According to prior art method clipping is performed if the signal Power P_{\max} at a peak maximum is higher than a predefined threshold T_{clip} , fulfilling the following equation: (i being the index referencing the considered peak)

$$(1) \quad P_{\max}^2(i) = I_{\max}^2(i) + Q_{\max}^2(i) > T_{\text{clip}}^2$$

20 A scaling factor $S(i)$ for the peak referenced with the index i is applied to the components I and Q of the signal s where:

$$(2) \quad S(i) = 1 - T_{\text{clip}} / P_{\max}(i)$$

Dirac Impulses D_I , resp D_Q with $S(i) * I_{\max}(i)$, resp. $S(i) * Q_{\max}(i)$ as amplitude and located at the position of the peak maximum $I_{\max}(i)$, resp.

25 $Q_{\max}(i)$ in each signal component I and Q .

$$(3a) \quad D_I(i) = S(i) * I_{\max}(i),$$

$$(3b) \quad D_Q(i) = S(i) * Q_{\max}(i).$$

The influence on any sample (I, Q) of the signal resulting from the application of the scaling factor calculated for one single isolated peak
30 referenced with index i is obtained with the following equations:

$$I_c = I - D_I(i) * \delta(\Delta_i)$$

$$Q_c = Q - D_Q(i) * \delta(\Delta_i),$$

where Δ_i is the distance between sample (I, Q) and the peak ($I_{\max}(i)$, $Q_{\max}(i)$).

- 5 The clipping of the peak ($I_{\max}(i)$, $Q_{\max}(i)$) itself is obtained when setting $\Delta = 0$, $\delta(0) = 1$):

$$(4a) \quad I_{\max}^c(i) = I_{\max}(i) - D_I(i) * \delta(\Delta) = I_{\max}(i) - I_{\max}(i) * S(i)$$

$$(4b) \quad Q_{\max}^c(i) = Q_{\max}(i) - D_Q(i) * \delta(\Delta) = Q_{\max}(i) - Q_{\max}(i) * S(i)$$

The choice of $S(i)$ guarantees that

$$10 \quad (5) \quad [I_{\max}^c(i)]^2 + [Q_{\max}^c(i)]^2 = T_{\text{clip}}^2.$$

Now, the influence on any sample (I, Q) of the signal caused by the successive clipping of m peaks is given by:

$$I_c = I - \sum_{j=1}^m D_I(i) * \delta(\Delta_j)$$

$$Q_c = Q - \sum_{j=1}^m D_Q(i) * \delta(\Delta_j)$$

- 15 Where Δ_j is the distance between sample (I, Q) and peak j .

The influence experienced by one peak ($I_{\max}(i)$, $Q_{\max}(i)$) resulting from the application of the corresponding scaling factors to all m peaks is obtained as follows:

$$I_{\max}(i)^c = I_{\max}(i) - \sum_{j=1}^m D_I(i) * \delta(\Delta_j)$$

$$20 \quad Q_{\max}^c(i) = Q_{\max}(i) - \sum_{j=1}^m D_Q(i) * \delta(\Delta_j)$$

It will be clear for a person skilled in the art that in this case the condition $[I_{\max}(i)^c]^2 + [Q_{\max}^c(i)]^2 = T_{\text{clip}}^2$ is not fulfilled.

If a first peak ($I(1)$, $Q(1)$) and a second peak ($I(2)$, $Q(2)$) are separated by a distance Δ , the following clipped signals are obtained :

$$25 \quad I_{\max}^c(1) = I_{\max}(1) - [D_I(1) * \delta(0) + D_I(2) * \delta(\Delta)]$$

$$Q_{\max}^c(1) = Q_{\max}(1) - [D_Q(1) * \delta(0) + D_Q(2) * \delta(\Delta)]$$

$$I_{\max}^c(2) = I_{\max}(2) - [D_I(1) * \delta(\Delta) + D_I(2) * \delta(0)]$$

$$Q_{\max}^c(2) = Q_{\max}(2) - [D_Q(1) * \delta(\Delta) + D_Q(2) * \delta(0)]$$

Using $\delta(0)=1$, setting $s_i(\Delta) = S(i)*\delta(\Delta)$, $s_i(0) = S(i)*\delta(0) = S(i)$ and replacing $D_i(i)=S(i)*I_{\max}(i)$, resp $D_Q(i)=S(i)*Q_{\max}(i)$ (from equation 3a, 3b), the following equation system is obtained:

$$\begin{aligned} 5 \quad I_{\max}^c(1) &= I_{\max}(1) - [s_1(0) * I_{\max}(1) + s_2(\Delta) * I_{\max}(2)] \\ Q_{\max}^c(1) &= Q_{\max}(1) - [s_1(0) * Q_{\max}(1) + s_2(\Delta) * Q_{\max}(2)] \\ I_{\max}^c(2) &= I_{\max}(2) - [s_1(\Delta) * I_{\max}(1) + s_2(0) * I_{\max}(2)] \\ Q_{\max}^c(2) &= Q_{\max}(2) - [s_1(\Delta) * Q_{\max}(1) + s_2(0) * Q_{\max}(2)] \end{aligned}$$

The terms $s_1(\Delta)$ resp. $s_2(\Delta)$ represent the influence of the second
10 peak on the first peak, resp. the influence of the first peak on the second peak.

According to the present invention, corrected signals ($I_{\max}(1)^*$, $Q_{\max}(1)^*$) resp ($I_{\max}(2)^*$, $Q_{\max}(2)^*$) taking into account the influence of the other signal are calculated the following way:

$$\begin{aligned} 15 \quad I_{\max}(1)^* &= I_{\max}(1) - D_i(2) * \delta(\Delta) \\ Q_{\max}(1)^* &= Q_{\max}(1) - D_Q(2) * \delta(\Delta) \\ I_{\max}(2)^* &= I_{\max}(2) - D_i(1) * \delta(\Delta) \\ Q_{\max}(2)^* &= Q_{\max}(2) - D_Q(1) * \delta(\Delta) \end{aligned}$$

According to the present invention, these corrected signals ($I_{\max}(1)^*$, $Q_{\max}(1)^*$), resp ($I_{\max}(2)^*$, $Q_{\max}(2)^*$) are used for applying the clipping
20 method.

This method is especially advantageous when the peaks are separated by a distance Δ smaller than a predefined distance. This predefined distance being preferably equal to the convolution range of two
25 peaks (i.e. range of the clipping function).

Because the clipping function $\delta(x)$ of a peak drops rapidly with increasing distance from its maximum (see Fig 1a), the most usual configurations are those where two or three peaks are considered to influence each other. It will however be clear for a person skilled in the art
30 that the method according to the present invention can be generalized to

take account of N peaks present in a time domain and influencing each other.

In case of two peaks influencing each other, an implementation of the method according to the present invention preferably comprises
5 following steps:

Step 21 consists in calculating the scaling factors without taking into account the influence of the adjacent peak:

$$S(i) = 1 - T_{\text{clip}} / P_{\text{max}}(i) \quad (\text{equation 2})$$

Step 22 consists in determining the Dirac impulses :

10 $D_I(i) = S(i) * I_{\text{max}}(i), (\text{equation 3a})$

$$D_Q(i) = S(i) * Q_{\text{max}}(i), (\text{equation 3b}).$$

Step 23 consists in calculating the corrected signals $(I(i)^*, Q(i)^*)$ for $i=1,2$.

15 $I_{\text{max}}(1)^* = I_{\text{max}}(1) - D_I(2) * \delta(\Delta)$

$$Q_{\text{max}}(1)^* = Q_{\text{max}}(1) - D_Q(2) * \delta(\Delta)$$

$$I_{\text{max}}(2)^* = I_{\text{max}}(2) - D_I(1) * \delta(\Delta)$$

$$Q_{\text{max}}(2)^* = Q_{\text{max}}(2) - D_Q(1) * \delta(\Delta)$$

Step 24 consists in calculating the power of the corrected signals $(I(i)^*, Q(i)^*)$:

20 $P(i)^{*2} = I(i)^{*2} + Q(i)^{*2}$

Step 25 consists in calculating the scaling factor $T(i)$ corresponding to the corrected signals and taking as a consequence into account the influence of the peaks on each other:

$$T(i) = 1 - T_{\text{clip}} / P(i)^*$$

25 Step 26 consists in solving the following equation system to obtain the dirac impulses $D_I(i), D_Q(i)$.

$$D_I(1) = D_I(2) * \delta(\Delta) + [I_{\text{max}}(1) - D_I(2)] T(1)$$

$$D_Q(1) = D_Q(2) * \delta(\Delta) + [Q_{\text{max}}(1) - D_Q(2)] T(1)$$

$$D_I(2) = D_I(1) * \delta(\Delta) + [I_{\text{max}}(2) - D_I(1)] T(2)$$

30 $D_Q(2) = D_Q(1) * \delta(\Delta) + [Q_{\text{max}}(2) - D_Q(1)] T(2)$

The obtained Dirac impulses are multiplied with the coefficients of the clipping function $\delta(x)$ to generate weighted clipping function coefficients. Preferably, the clipping function consists in 256 coefficients. However any clipping functions known in the art could be used in the framework of the present invention.

Step 27 consists in subtracting the weighted clipping function coefficients with the input signals $(I(1), Q(1))$, $(I(2), Q(2))$ (according to the equation system $I_c(i) = I(i) - D_I(i) * \delta(\Delta_i)$, $Q_c(i) = Q(i) - D_Q(i) * \delta(\Delta_i)$).

According to the present invention, this method guarantees that no overclipping occurs and that the clipped signal reaches the predefined threshold T_{CLIP} .

In a preferred embodiment of the invention several iterations of the method are repeated to improve the performance of the clipping method according to the present invention.

In this embodiment steps 23 to 26 are repeated until the number of iterations is reached.

Preferably, two or three iterations gives better results.

In a further preferred embodiment of the present invention, a step of hard clipping is applied to the signal clipped with several iterations of the method according to the present invention.

It will be clear for a person skilled in the art that the method according to the present invention can be extended to an approach with N peaks influencing each other. It represents a direct generalization of the previous equations and leads to an equation systems having $D_I(i)$, $D_Q(i)$ for $1 \leq i \leq N$ as parameters and which should be solved according to usual equation systems solving methods which will not be further described.

Figure 3 shows an embodiment of a transmitter according to the present invention.

The transmitter comprises a clipping module 10 with a signal power calculation module 11, a peak detector 12, and a scaling factor

calculation module 13. Clipping module 10 receives as input a baseband signal consisting of an in-phase part, Input I, and an in-quadrature part, Input Q. The base band signal is represented in digital form so that clipping module 10 performs digital processing.

- 5 In-phase, Input I, and in-quadrature, Input Q, parts of the signal are connected to signal power calculation module 11 which determines the magnitude of the signal (i.e. by determining the module of the vector having the in-phase value as real part and the in-quadrature value as complex part in the complex space).
- 10 The signal power is submitted to peak detector 12 which compares the amplitude of the signal magnitude with a predefined threshold value T_{CLIP} . Peak detector 12 determine the different peak amplitudes P_{max} , the corresponding I and Q coordinates I_{max} , Q_{max} and the peak positions T_{max} .
- 15 Peak detector 12 selects the peak which amplitude is higher than the threshold T_{CLIP} . that should be taken into account for further processing. A further selection criterion is the number N of peaks to be kept for further processing in a time window of predefined duration. An other selection criterion is the distance between two consecutive peaks. This distance being
- 20 preferably smaller than a predefined distance (e.g. the convolution range of the clipping function (impulse answer). Other peak selection criteria may be envisaged.

- Information on the selected peak amplitude I_{max} , Q_{max} , P_{max} , T_{max} is submitted to scaling factor calculation module 13 which calculates
- 25 a scaling factor to be applied to each peaks taking into account the influence $DI_{previous}$, $DQ_{previous}$ and $T_{max_{previous}}$ of the other peaks located in the convolution range of the peak. In the case N peaks have influence on each other, the influence of all N peaks is taken into account in the scaling factor calculation.

Scaling factor calculation module 13 further calculates the Dirac functions according to step 26 of fig 2 to obtain D_I and D_Q .

The clipping functions coefficients are weighted with the calculated dirac functions D_I and D_Q and subtracted from the signal Input I and Input Q as usually performed in the art ($I_c = I - D_I(i) * \delta(\Delta_i)$, $Q_c = Q - D_Q(i) * \delta(\Delta_i)$). It is to be noted that the input signal should be delayed by the appropriate time delay as known by a person skilled in the art.

The calculated dirac functions D_I and D_Q are stored in scaling factor calculation module 13 to be used as $D_{I_previous}$, $D_{Q_previous}$ when calculating the dirac functions for next peak.

Contrary to usual known clipping methods consisting in saturating the peaks at the threshold value, the method according to the invention consists in applying scaling factors to the peaks which have an amplitude above a predefined threshold T_{CLIP} which takes as exactly as possible into account the influence of other peaks located in the convolution range of the peak not to generate overclipping effects. The method according to the invention the spectrum of the input signal experiences less distortions than with usual clipping methods.

Figure 4 shows the results of the clipping method according to the present invention. x-coordinate of the diagram represents the time or more precisely the sample number of the signal in the time window, y-coordinate of the diagram represents the amplitude of the signal magnitude.

This example has been done using a single carrier signal, it will however be clear for a person skilled in the art that identical results can be obtained for a multi-carrier signal.

The section of the signal 41 shown on figure 4 normally causes problems for methods ignoring the mutual influences of adjacent peaks having an amplitude higher than a predefined threshold T_{CLIP} . The curve 42 shows the clipped signal obtained using the method according to the present invention after one iteration and using the two peaks approach.

Figure 5 illustrate an example where the ACLR obtained when using different clipping methods are compared. x-coordinate of the diagram represents PAR of the clipped signal, y-coordinate of the diagram represents ACLR in dB.

5 Curve 51 shows the ACLR obtained when applying the clipping method according to the present invention after 3 iterations.

Curve 52 shows the ACLR obtained when applying three iterations of a prior art clipping method which does not take into account the mutual interaction on close peaks.

10 For PAR higher than about 4 dB, the ACLR increases significantly for curve 52. On the contrary using the method according to the present invention the ACLR increases slightly in the same domain and remains lower than the value ACLR threshold guarantying good performance in term of Peak Code Domain Error and Bit Error Rate in the
15 telecommunication network.

The result of the clipping method according to the present invention leaves almost unchanged the ACLR up to a Peak to Average Ratio equal to about 4 dB.

CLAIMS

- 1/ Method for scaling peak power amplitudes in a signal (I, Q) at a transmitter before submitting said signal to a power amplifier, said method comprising
- 5 the step of:
- calculating scaling factors for a pulse train comprising a group of at least two peaks ($(I_{\max}(1), Q_{\max}(1)), (I_{\max}(2), Q_{\max}(2))$), which power exceed a predefined threshold (T_{CLIP}), said scaling factor ($T(1), T(2)$), for one peak taking into account an influence on said peak which occurs if at least one
 - 10 other peak of said group is applied a scaling factor ($T(2), T(1)$);
 - applying said calculated scaling factors ($T(1), T(2)$) to said respective peaks ($(I_{\max}(1), Q_{\max}(1)), (I_{\max}(2), Q_{\max}(2))$) of said group.

2/ Method according to claim 1, wherein said influence depends on the

15 distance (Δ) between said peak and said at least one other peak.

3/ Method according to claim 1, wherein said step of calculating scaling factors comprises the sub-steps of:

- calculating corrected signals (21, ..., 23) for each peak taking into
- 20 account the influence of the other peaks;

- Calculating (24, 25, 26) for each peak a scaling factor starting from said corrected signal.

4/ Method according to claim 1, wherein said scaling factors for said train of pulses guaranty that the power of the scaled peaks belonging to said group reaches said predefined threshold (T_{CLIP}).

5/ Method according to claim 1, wherein said scaling factors for said train of pulses guaranty that the average power of the clipped signal is higher than a predefined threshold value (MAX).

6/ Method according to claim 1, wherein at least two iterations of said method are successively applied to said signal followed by a step of hard clipping

7/ Method according to claim 1, wherein said signal is a signal comprising a plurality of single carrier signals constituted by a superposition of several CDMA signals.

8/ Transmitter comprising means (13, 141, 142) for scaling peak power of a signal, said transmitter further comprising a power amplifier for amplifying said signal, said transmitter being characterized in that said means for scaling peak power (14, 141, 142) comprises:

- means (13) for calculating scaling factors for a pulse train comprising a group of at least two adjacent peaks which power exceed a predefined threshold (T_{CLIP}), said scaling factor for one peak including the influence on said pulse train which occurs if at least one other peak of the group is applied a scaling factor;
- means (141, 142) for applying said calculated scaling factors to said respective peaks of said group.

9/ Transmitter according to claim 8, characterized in that said means (14) for scaling peak power is implemented on a DSP or a FPGA.

- 5 10/ Transmitter according to claim 8, characterized in that it is used in a base station of a CDMA radio communication network.

A B S T R A C T



METHOD FOR SCALING PEAK POWER AMPLITUDES IN A SIGNAL AND CORRESPONDING TRANSMITTER

The invention relates notably to a method for scaling peak power amplitudes in a signal at a transmitter before submitting said signal to a power amplifier.

According to the invention, the method consists in :

- calculating scaling factors for a pulse train comprising a group of at least two adjacent peaks which power exceed a predefined threshold (T_{CLIP}), said scaling factor for one peak taking into account an influence on said peak which occurs if at least one other peak of said group is applied a scaling factor;
- applying said calculated scaling factors to said respective peaks of said group.

FIG. 3

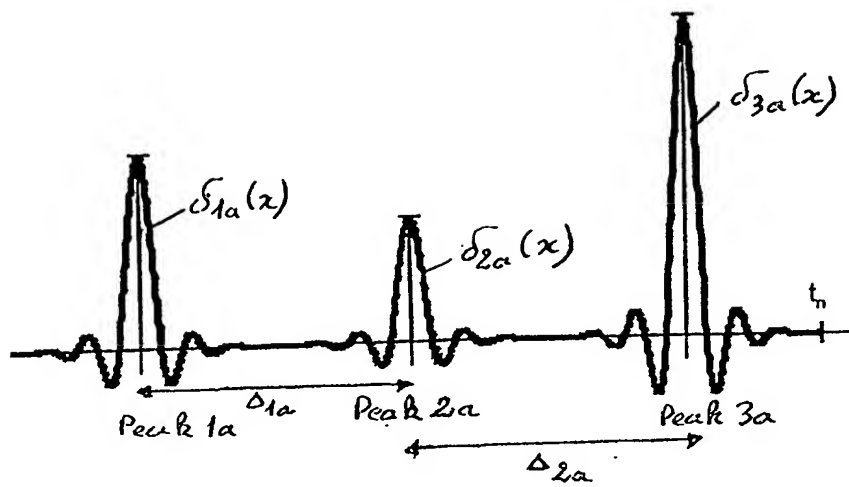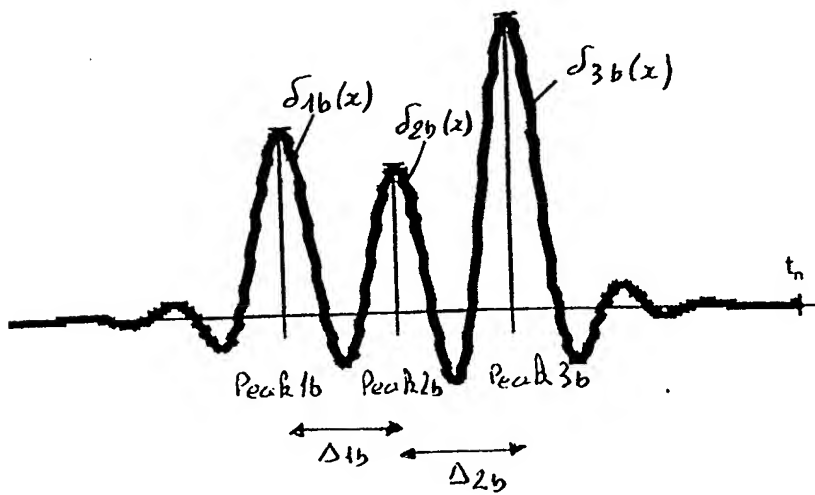**Fig 1a****Fig 1b**

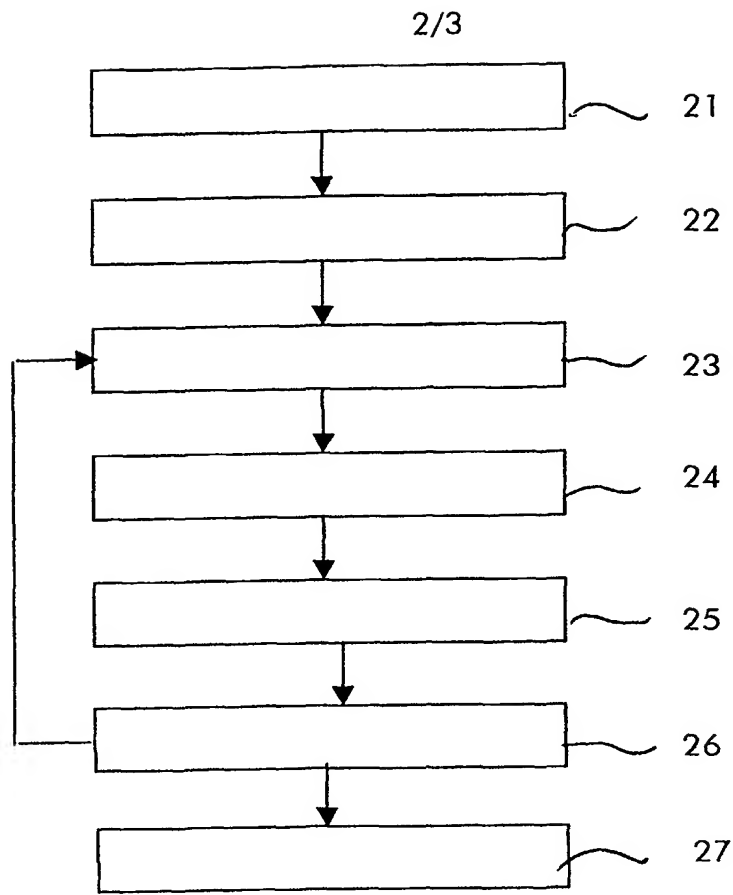


Fig 2



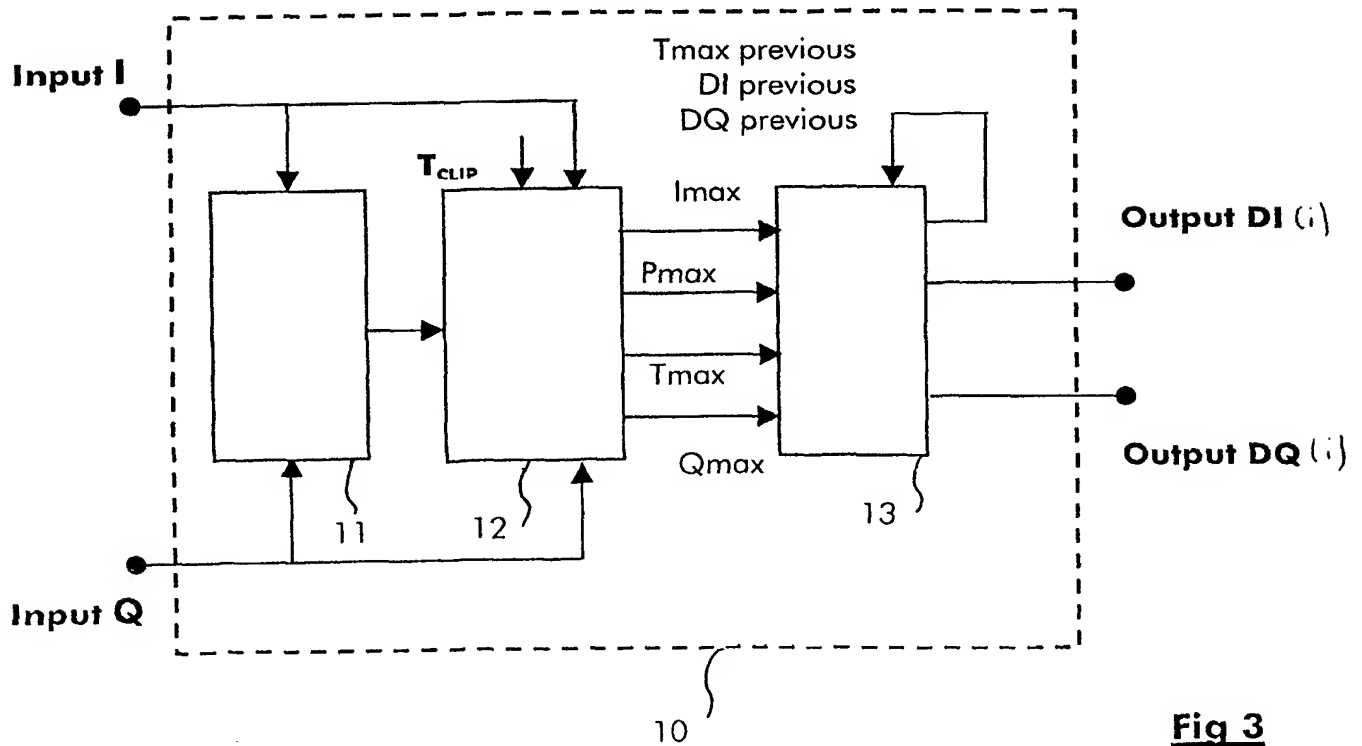


Fig 3

**Fig 4****Fig 5**

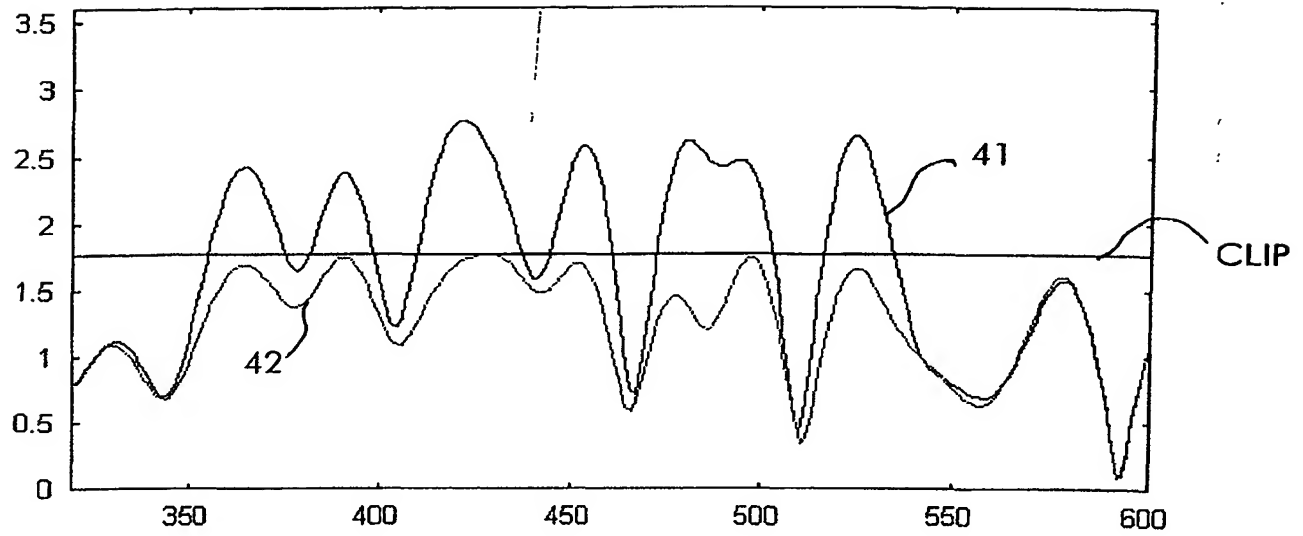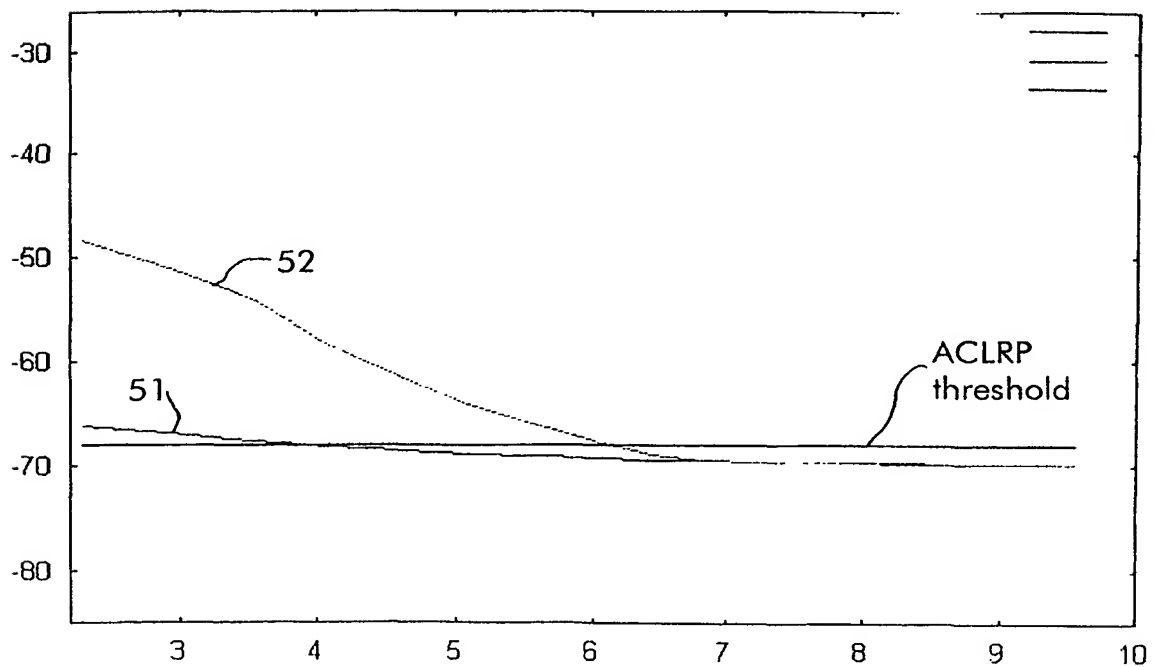